


COMMUNITY DEVELOPMENT PERMIT CENTER




WOOD SEPERATION FROM EARTH

2001 CBC 2306.3

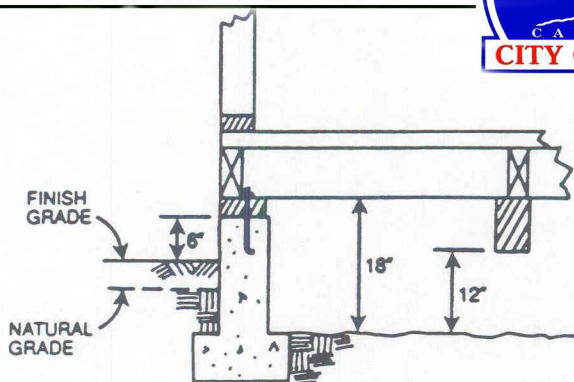


UNDER-FLOOR CLEARANCE


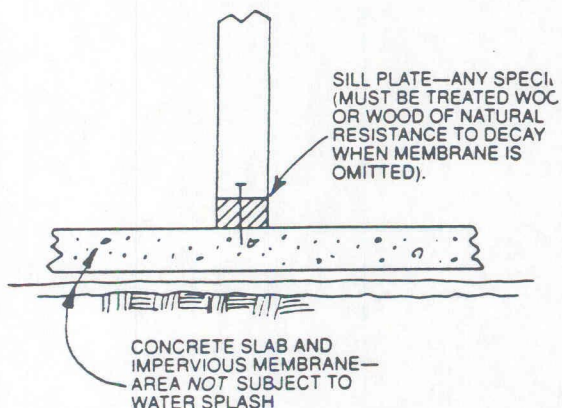


2001 CBC 1900.4.4 SPECIFIES CONCRETE TO HAVE A MINIMUM THICKNESS OF 3 INCHES. WHILE SECTION 1924 STATES THAT A CONCRETE SLAB ON GRADE MUST BE AT LEAST 3 1/2 INCHES THICK.

PROTECTION AGAINST DECAY
PLATES, SILLS AND SLEEPERS

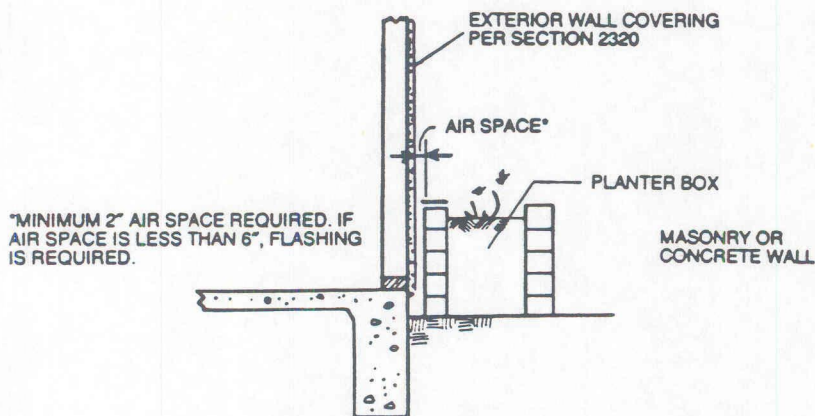


PROTECTION AGAINST DECAY
PLANTER BOXES

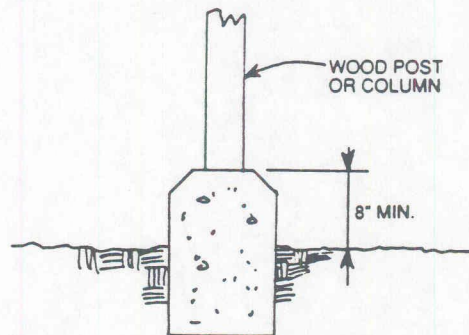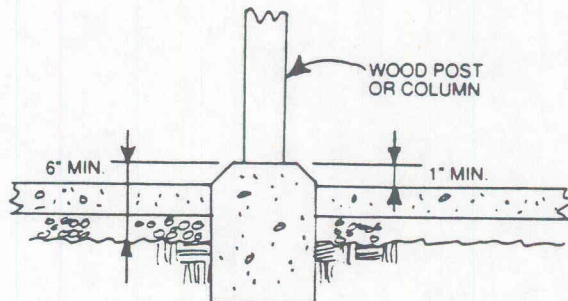

PROTECTION AGAINST DECAY
COLUMNS AND POSTS

Figure 2317-3

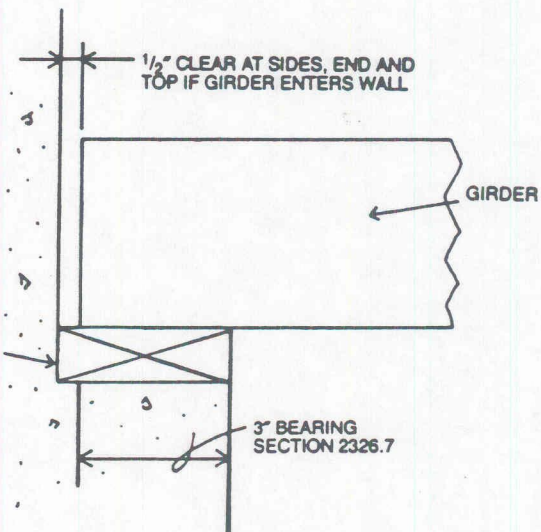

PROTECTION AGAINST DECAY
GIRDERS